


VENUS

DEEP EMBOSSED



55 Venus Roco P1 - Reflex
door leaf, laminated door-frame

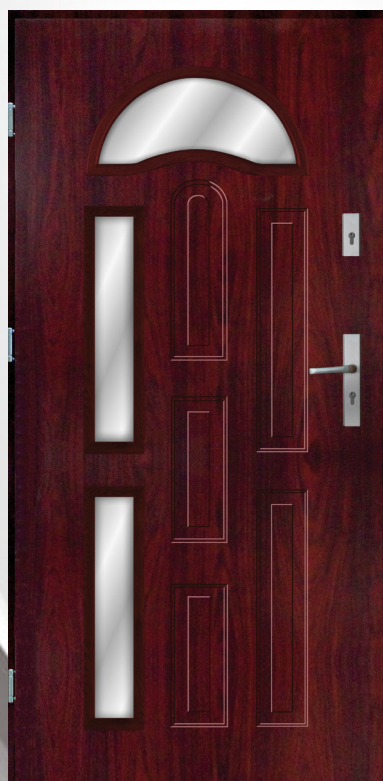

55 Venus Roco P2 - Reflex
door leaf, laminated door-frame



55 Venus Roco - Daisy
door leaf, laminated door-frame

55 Venus.2 Roco P1 - Reflex
door leaf, laminated door-frame

55 Venus.2 Roco P2 - Reflex
door leaf, laminated door-frame

55 Venus.2 Roco - Daisy
door leaf, laminated door-frame

55 VENUS

55 VENUS.2
BURGLARPROOF
CLASS 2



55 Venus Roco P1-Daisy
door leaf, laminated door-frame




55 Venus Roco P2-Daisy
door leaf, laminated door-frame

55 Venus.2 Roco P1-Daisy
door leaf, laminated door-frame

55 Venus.2 Roco P2-Daisy
door leaf, laminated door-frame

The width of the door: 800 mm, 900 mm

AVAILABLE
COLOURS:






55 Titanium
door leaf, laminated door-frame



55 Titanium Roco-Diamond
door leaf, laminated door-frame

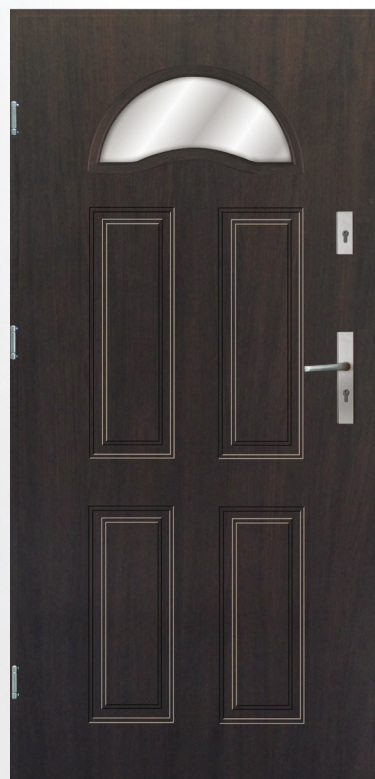

55 Titanium Roco - Reflex
door leaf, laminated door-frame


55 Titanium.2
door leaf, laminated door-frame

55 Titanium.2 Roco-Diamond
door leaf, laminated door-frame

55 Titanium.2 Roco - Reflex
door leaf, laminated door-frame



55 Titanium Roco P1 - Reflex
door leaf, laminated door-frame

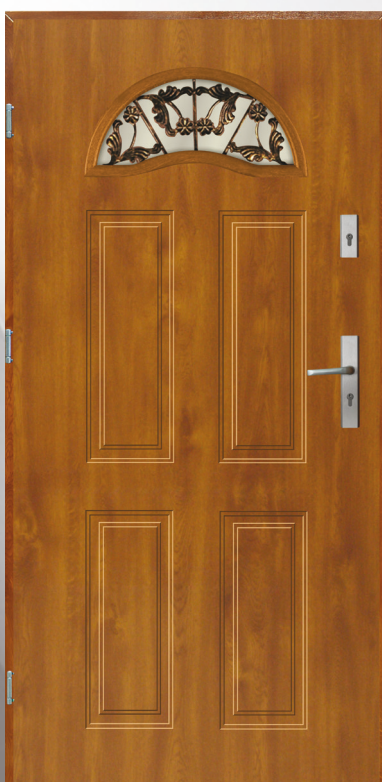


55 Titanium Roco - Daisy
door leaf, laminated door-frame

55 Titanium.2 Roco P1 - Reflex
door leaf, laminated door-frame

55 Titanium.2 Roco - Daisy
door leaf, laminated door-frame

The width of the door: **800 mm, 900 mm**

**AVAILABLE
COLOURS:**



TITANUM
DEEP EMBOSSED

55 TITANUM
55 TITANUM.2
BURGLARPROOF
CLASS 2



ELLIPSE

FLAT EMBOSSED

55 ELLIPSE

55 ELLIPSE.2
BURGLARPROOF
CLASS 2



55 Ellipse - Matelux
door leaf, laminated door-frame

55 Ellipse.2 - Matelux
door leaf, laminated door-frame



55 Ellipse - Daisy
door leaf, laminated door-frame

55 Ellipse.2 Daisy
door leaf, laminated door-frame



55 Ellipse - Megres
door leaf, laminated door-frame

55 Ellipse.2 - Megres
door leaf, laminated door-frame

**AVAILABLE
COLOURS:**



The width of the door: **800 mm, 900 mm**

**AVAILABLE
COLOURS:**



The width of the door: **1000 mm**



55 Ellipse

door leaf, laminated door-frame

55 Ellipse.2

door leaf, laminated door-frame

AVAILABLE COLOURS:

The width of the door: **800 mm, 900 mm**



The width of the door: **1000 mm**



55 Smooth

door leaf, laminated door-frame

55 Smooth.2


door leaf, laminated door-frame

AVAILABLE COLOURS:

The width of the door: **800 mm, 900 mm**



The width of the door: **1000 mm**



ELLIPSE

FLAT EMMBOSS

55 ELLIPSE

55 ELLIPSE.2

BURGLARPROOF
CLASS 2



SMOOTH

55 SMOOTH


55 SMOOTH.2

BURGLARPROOF
CLASS 2



Metal, entrance doors
external/internal (thickness 48 mm)
in accordance with standard PN-EN 14351-1:2006+A1:2010


CONSTRUCTION OF THE DOOR:

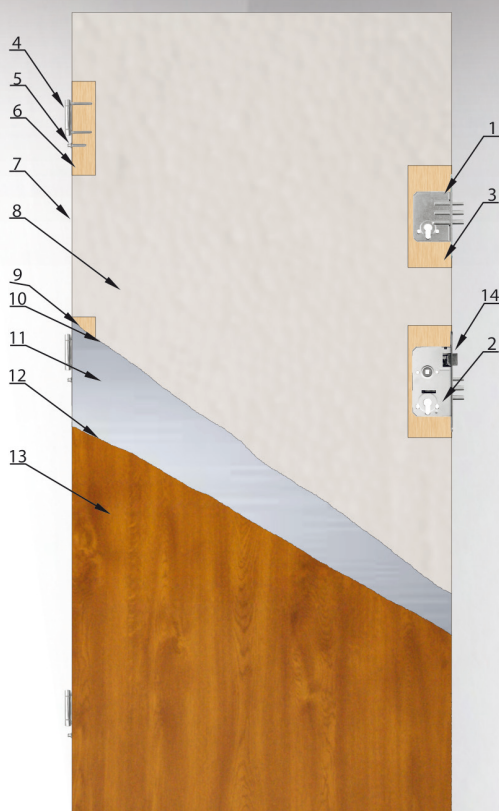

1. Additional lock
2. Main lock
3. Pocket of lock
4. Tripartite hinges Ø16
5. Bolt protecting against forcing
6. Reinforcement for the hinges
7. Seal faying
8. Slab of hard polystyrene
9. Glue
10. The zinc coating
11. Steel sheet
12. The zinc coating
13. Laminate with woodgrain finish
14. Lock adjustment or electric doorstrike



THE PROFILE OF LEAF – DOOR AND DOOR-FRAME:

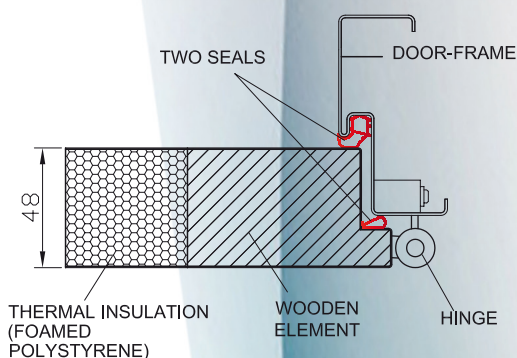

ADOPTION

Doors for the installation in housing development and public utility

- smooth or pressed of steel sheet covered with PVC decorative film, resistant to UV rays,
- filled with slab of foamed hard polystyrene,
- protected against forcing: lower three-bolt lock, upper three-bolt lock and three fixed bolts protecting against forcing,
- two seals on the door circumference: seal of leaf and seal of door frame,
- structure of hinges for doors opening outside and inside makes it impossible to remove door leaf.

STANDARD EQUIPMENT:

- door leaf with seal,
- door-frame in the same color like a leaf with seal,
- main three-bolt lock,
- additional three-bolt lock,
- fixed bolts protecting against forcing,
- tripartite hinges Ø16,
- lock adjustment.

In the standard equipment the frame which is available is:

- asymmetric,
- corner.

ADDITIONAL EQUIPMENT FOR EXTRA CHARGE	
Lock insert 30x50 Lock insert with knob 30x50	„system on one key“ 6.2.C. category
Lock insert 30x50 Lock insert with knob 30x50	„system on one key“ 6.2.B. category
Lock insert 30x50 Lock insert with knob 30x50	„system on one key“
Lock insert 30x50	
Lock insert with knob 30x50	
Handle NIAGARA - AXA	
Handle OTTAWA - AXA	
Handle KASTOR - MAR-TOM	
Handle ZEUS - MAR-TOM	
Handle PROXIMA - MAR-TOM	
Handle-rail NIAGARA - AXA	
Special ("WARM") Threshold 80/90	
Aluminum Threshold 80/90	
Viewfinder	
Electric doorstrike	
Reinforcement for self-door closer	
Reduce the length of door (max170 mm)	

The rate of acoustic insulation – 27 dB

Heat permeability rate of sash section:

width 800 mm complete - 1,6 [W/(m²*K)] width 800 mm glazed - 1,7 [W/(m²*K)]
width 900 mm complete - 1,5 [W/(m²*K)] width 900 mm glazed - 1,8 [W/(m²*K)]

